


Power

Cordex™ 400W

Modular Switched Mode Rectifier

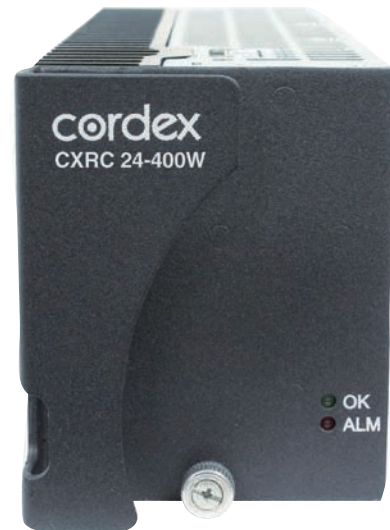

CXRC 24-400W

- Available in 14A @ 24VDC
- Universal 120/208 to 240VAC input
- High efficiency and power factor correction
- Convection cooled
- Hot swappable, 2RU ultra compact design

Cordex rectifiers bring advanced technology to the DC power industry. Innovative engineering combines the best in efficiency and reliability meeting the power requirements for a variety of system applications.

The Cordex 400W rectifier is available in a choice of 19" or 23" shelf configurations. Both system options come complete with distribution, controller, and capacity for four rectifiers. With 1.6kW total output per shelf, it is an ideal solution to meet the needs of applications requiring lower power.

Local and remote setup, adjustment, and control is a simple single-step process with the Cordex CXC System Controller. By utilizing TCP/IP technology, complete configuration and monitoring of power equipment is possible through a network web browser.

Cordex 400W Modular Switched Mode Rectifier

Rectifier Module(s)

Electrical

Input voltage: 90 to 320VAC
 Power output: 400W
 Input frequency: 45 to 70Hz
 Power factor: >99%
 THD: <5%
 Efficiency: >90%
 Output voltage: 20 to 29VDC
 Output current: 14A @ 27VDC (14A max.)
 Load regulation: Static $\pm 0.5\%$

Dynamic $\pm 2\%$ for 50 to 100% load step
 2ms recovery time

Line regulation: Static $\pm 0.1\%$
 Dynamic $\pm 1\%$ for any change within rated limits
 Wide band noise: <30mVrms
 <150mVp-p
 Psophometric noise: <1mV

Mechanical

Dimensions
 mm: 88.4H x 71.6W x 242D
 inches: 3.4H x 2.8W x 9.5D
 Weight: 1.4kg (3lb)

Features

Indicators: AC mains OK—green LED
 Module alarm—red LED
 Cooling: Natural convection
 Adjustments: (via CXC Controller)
 Float and equalize voltage
 Battery test voltage
 High and low voltage alarms
 High voltage shutdown
 Current limit
 Start delay time
 Slope %
 Protection: Current limit/short circuit
 Input/output fuses
 Output high voltage shutdown
 Output power limiting
 Thermal foldback/shutdown
 Input transient
 AC low line foldback/shutdown
 AC high voltage shutdown

Environmental

Temperature
 Operation: -40 to 50°C (-40 to 122°F)
 (power derated up to 70°C/158°F)
 Storage: -40 to 85°C (-40 to 185°F)
 Humidity: 0 to 95% RH non-condensing
 Elevation: -500 to 3000m (-1640 to 9840ft)
 Heat dissipation: <151 BTU per hour

Shelves

Mechanical

19" shelf

Dimensions
 mm: 88.9H x 444W x 279.4D
 inches: 3.5H x 17.5W x 11D
 Weight: 8.5kg (18.7lb)
 Mounting: Fits 19" rack flush mount

23" shelf

Dimensions
 mm: 133H x 533W x 279.4D
 inches: 5.25H x 21W x 11D
 Weight: 12.7kg (28lb)
 Mounting: Fits 23" rack center mount

Note: Consult factory for other 12", 19" and 23" shelf configurations.

Connections

Input: Dual feed terminal blocks
 4 to 6mm² (12 to 10AWG)
 Output: ¼" studs on ½" centers
 Chassis ground: ¼" stud
 CAN communication: RJ 12 offset

Standards

The Cordex 400W is designed to meet the following:

Safety: CSA C22.2 No 60950-1-03
 UL 60950-1 1st Edition
 CE marked
 IEC/EN 60950-1
 EMC: ETSI 300 386
 Emissions: CFR47 (FCC) Part 15 Class B
 ICES-03 Class B
 EN55022 (CISPR 22) Class B
 C-tick (Australia)
 EN 61000-3-2
 EN 61000-3-3
 Immunity: EN 61000-4-2
 EN 61000-4-3
 EN 61000-4-4
 EN 61000-4-5
 EN 61000-4-6
 EN 61000-4-11
 ANSI/IEEE C62.41 Cat B3

For contact information visit www.argusdcpower.com

The Alpha Group >	Europe, Middle East & Africa	Asia Pacific	North America	Latin & South America	
	Cyprus Tel: +357 25 375 675 Fax: +357 25 359 595 South Africa Tel: +27 11 608 1936 Fax: +27 11 608 1948	Germany Tel: +49 9122 79889 0 Fax: +49 9122 79889 21 United Kingdom Tel: +44 1279 501110 Fax: +44 1279 659870	Russia Tel: +7 495 916 1854 Fax: +7 495 916 1349 P.R. China Tel: +86 769 533 2600 Fax: +86 769 532 6603	Canada Tel: +1 604 436 5900 Fax: +1 604 436 1233 USA Tel: +1 360 671 7054 Fax: +1 360 671 7096	Mexico Tel: +52 55 5280 6990 Fax: +52 55 5280 6585